




# NUHEAT™

## **Floor Warming Control with G.F.C.I. (FTGF-1P)**

- Designed to control the temperature of the floor.
- Equipped with a Class "A" G.F.C.I.
- Will safely shut down in the event of a fault to ground.
- Maximum load 16 Amps.
- Comes complete with a 15 ft. isolated sensor probe wire.
- Digital display can be used to show floor temperature in Celsius or Fahrenheit .
- Can be pre-programmed to both "comfort" and "economic" set points.

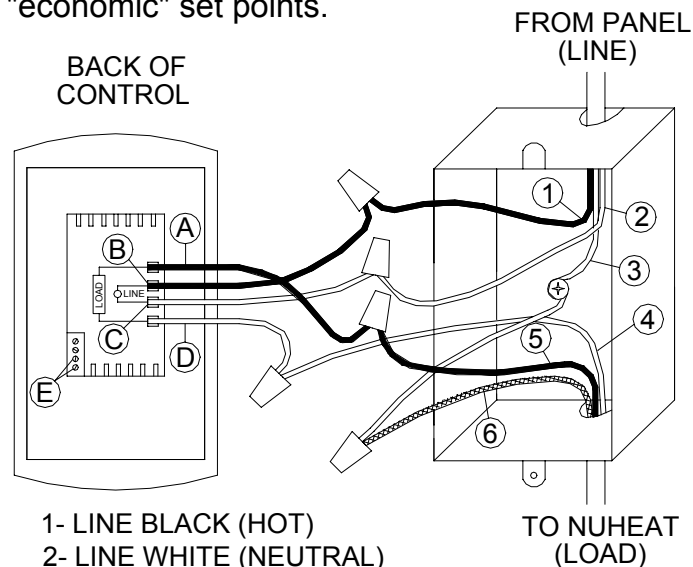

- 1- LINE BLACK (HOT)
  - 2- LINE WHITE (NEUTRAL)
  - 3- BARE COPPER (GROUND)
  - 4- LOAD WHITE (NEUTRAL)
  - 5- LOAD BLACK (HOT)
  - 6- METALLIC BRAID (NUHEAT GROUND)
- A- LOAD BLACK (HOT) FROM CONTROL  
B- LINE BLACK (HOT) FROM CONTROL  
C- LINE WHITE (NEUTRAL) FROM CONTROL  
D- LOAD WHITE (NEUTRAL) FROM CONTROL  
E- SENSING PROBE CONNECTS TO BOTTOM TWO SCREWS (NO POLARITY REQ'D)

NUHEAT INDUSTRIES LTD. ASSUMES NO RESPONSIBILITY FOR FIELD WIRING  
PLEASE CONSULT A CERTIFIED ELECTRICIAN FOR FURTHER INSTRUCTION IF NEEDED.  
WIRING MUST BE IN ACCORDANCE WITH NATIONAL AND LOCAL ELECTRICAL CODES.  
WIRING METHODS MAY DIFFER FOR EACH CONTROL, PLEASE CONSULT  
MANUFACTURER'S INSTRUCTIONS FOR ACTUAL SPECIFICATIONS.